

SURFACE EQUIPMENT

1000M/2000M WINCH | 3000M WINCH



Robertson Geo designs and builds its own range of winches of varying capacities for deploying subsurface probes on 4-core or co-axial cable.

Each winch is precision engineered for reliable use in the most challenging field applications. The winches are fully compatible with the Micrologger2 surface system and the full range of Robertson Geo probes, for depths of up to 3,000m.

1000m/2000m Winch

The standard unit for truck-mounted operations in deep boreholes, the 2000m winch includes an integral depth wheel and an automatic level wind.


SPECIFICATION:

Specifications

Capacity:	2030m (6658') 3/16" 4-core cable 1030m (3378') 1/4" coaxial cable
Speed:	0 – 30m/min (0 – 99ft/min)
Motor:	2hp (1.5kW) at 110/220VAC
Size:	605(w) x 1060(l) x 735(h) mm
Weight:	142kg excluding cable

Part Numbers

1018194	2000m winch for 3/16" 4-core cable includes tripod, power and data cable
1018193	1000m winch for 1/4" coaxial cable includes tripod, power and data cable

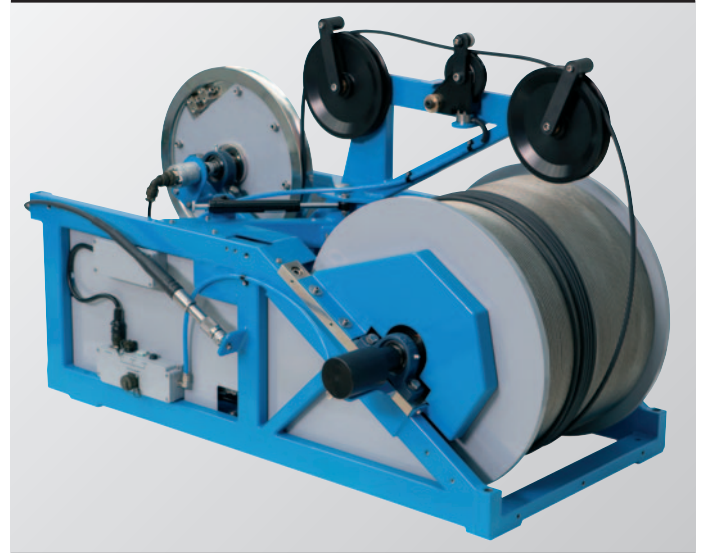

3000m Winch

A heavy-duty electric draw-works designed for deeper hole and oil/gas investigations. *Please note the pressure limits of standard Robertson Geo slimhole tools.*


SPECIFICATION:

Specifications

Capacity:	3000m (9840') 3/16" cable
Speed:	0.2 – 34m/min rim: 0.5 – 100m/min
Pull:	1,350kgF Rim: 460kgF
Motor:	440VAC 3-Phase 4kVA
Dimensions:	1000(w) x 1100(l) x 900(h) mm
Weight:	415kg excluding cable

Part Numbers

1013866	3000m winch for 3/16" four-core system includes tripod, power and data cable
---------	---

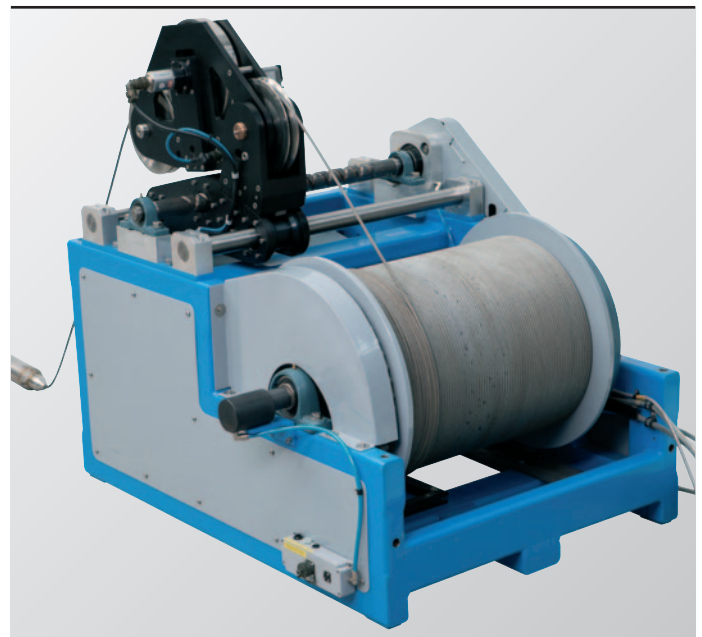

Scan the QR code to
go directly to
www.robertson-geo.com



1/1