

**New Four-Core 3,000m
(10,000ft) world first
high speed wireline
borehole camera system**



RGeo-eye® is a slimline full colour downward view camera, operating on a 4-core or coaxial cable at high transmission rate and is fully compatible with existing Robertson Geo winches and surface systems.

Seeing is believing

RGeo-fast® 

Delivering 1 Megabit/sec communications speed



RGeo-eye® employs a downward facing window with a fish-eye lens fully corrected for lens distortion before data is compressed and sent uphole. An LED light source, with controllable brightness is integral to the probe.



Open hole.



Cased hole.

Seeing is believing

The RGeo-eye® camera system is a new introduction of a design and build development by Robertson Geo. It has a deep operating range for the acquisition of high quality video feed for deep subsurface applications. The camera operates on industry-standard 4-core or coaxial wireline cable, and offers pressure ratings to 5000 psi and a 75°C temperature rating.

RGeo-fast® 

Delivering 1 Megabit/sec communications speed

The system incorporates RGeo-fast® delivering 1 Megabit/sec communication speed enabling the acquisition of high resolution video feed from downhole (to 3,000m) in air or water filled open or cased boreholes while allowing real-time viewing for the surface operative.

The camera has auto focus, a frontal LED internal array with adjustable lighting intensity, and a viewing resolution of SVGA (800 x 600) at 25 frames/sec.






The RGeo-eye® is a robust, easy to deploy downhole camera at 1,170mm x 43mm and only 5kg.

First release of the RGeo-eye® camera is rated at 75°C (85°C version available) with 100°C version to be released in Q1 2021.

The acquisition software package provided with the RGeo-eye® camera system allows extensive operator control including video resolution, frame rate, shutter speed, lighting brightness, white balance, UXGA 'snapshot' mode and real time video annotations.

Four user definable presets allow the operator to store optimal settings for various borehole conditions. Video is recorded in AVI and converted to MP4 for storage and relay.

It allows screen shots to be captured and text editing while viewing/recording. Where more detail is required, full colour 'snapshot' images can also be captured at 1600 x 1200.

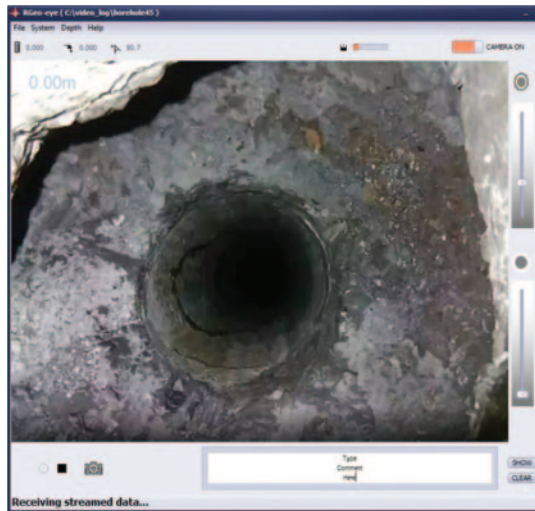


The RGeo-eye® camera comes with acquisition software that's easy to configure and work with, offering resolution control; lighting control; depth recording; text editing; recording video and screenshots.



YouTube videos:

If viewing this literature digitally, click for downhole videos available on YouTube RGeo-eye® playlist.

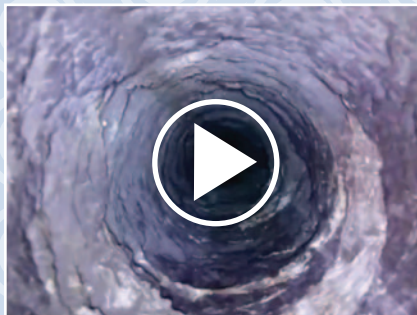

Short video.



Downhole video.



APPLICATIONS:

Borehole and casing integrity inspection
Surveillance of mines, shafts, caverns and voids
Assessment of deep concrete piles
Pre-logging borehole examination
Damage detection in subsurface structures

OPERATING CONDITIONS:

Borehole Type: Air/water filled open hole or cased hole
Recommended Logging Speed: 2 – 5m/min
Depth rating: 3,000m / 4-core or coaxial cable

SPECIFICATIONS:

Diameter: 43mm
Length: 1,170mm
Weight: 5kgs
Communication rate: RGeo-fast® 1 Megabit/sec
Resolution: 25 frames per sec SVGA (800x600)
'Snapshot' mode: high resolution still image at UXGA (1600 x 1200)
Max temperature: 75°C
(85°C available, 100°C version to be released in Q1 2021)
Max pressure: 5000 psi
Autofocus
Frontal LED internal array, with adjustable lighting intensity
Additional lighting options for large diameter voids
CE compliant
Recommended minimum computer specification: i7 7700 processor with 16GB of memory running Intel HD Graphics 630 card running Windows 10 64-bit

PART NUMBERS:

I020263 RGeo-eye® Digital Downhole Camera (1,000m)
I020408 RGeo-eye® Digital Downhole Camera (2,000m)
I020409 RGeo-eye® Digital Downhole Camera (3,000m)
I020412 Custom Peli Case for RGeo-eye® Camera
I020264 RGeo-eye® Centraliser 76-110mm
I020265 RGeo-eye® Centraliser 90-180mm
I020266 RGeo-eye® Centraliser 180-260mm
I020267 RGeo-eye® Sinker Bar



Robertson Geologging Ltd.

Deganwy, Conwy, LL31 9PX, United Kingdom | T: +44 (0) 1492 582 323 | E: info@robertson-geo.com

Robertson Geologging (USA) Inc.

1809 N. Helm Ave., Suite 4, Fresno, CA 93727, USA | T: +1 (559) 456 1711 | E: sstroud@robertson-geo.com

Robertson Geologging (Asia) Inc.

Flat 21A, Village Tower, 7 Village Road, Happy Valley, Hong Kong | T: +852 650 33486 | E: steveparry@robertson-geo.com

www.robertson-geo.com