


# PROBES

## FORMATION DENSITY, DENSITY GUARDLOG & IRON ORE DENSITY

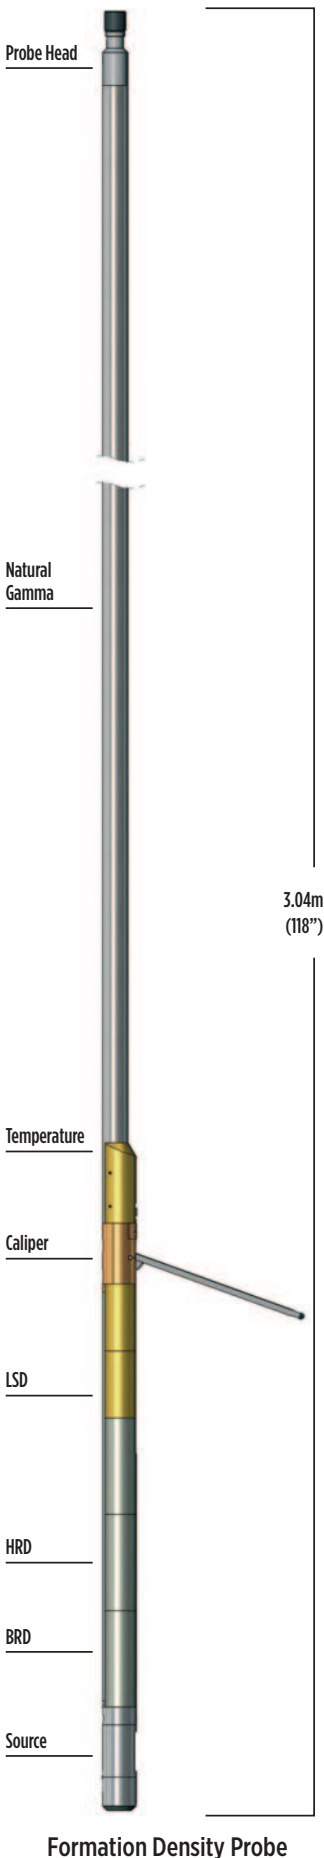

The Formation Density probe uses dual shielded detectors to provide a borehole-compensated density measurement with good bed-boundary resolution.

The Density Guardlog probe offers an additional LL3 focussed electrical measurement with good vertical resolution and depth of investigation. The Iron Ore Density probe includes extra collimation, different source-detector spacings and a higher activity source to extend the density range to 5g/cc for iron ore logging.

### Principle of Measurement:

The probes contain a detachable <sup>137</sup>Cs gamma source and two scintillation gamma detectors. The active windows of the source and detectors are maintained in contact with the borehole wall by a motorised caliper arm. Gamma radiation back-scattered by the formation (Compton effect) reaches the detectors where the relative count rates provide a measure of formation density.

### SPECIFICATION:

#### Features

- Compensated density output in engineering units (g/cc)
- Short-spacing detector for high vertical resolution
- Tungsten shielding reduces borehole effects
- Standard calibration blocks for field or base use

#### Measurements

- Bulk density
- High-resolution density (HRD)
- Natural gamma
- Caliper
- Options: Guard resistivity, Bed-resolution density (BRD), Temperature
- Dual calibrated density channels
- Fluid Temperature

#### Applications

##### Minerals:

- Density and porosity
- Lithology
- Bed thickness and boundary location
- Coal ash and moisture content

##### Engineering:

- Rock strength and elasticity parameters (with sonic log)
- Detection of weathered or fractured zones

##### Water:

- Location of aquifer and aquitard
- Detection of cavities and missing cement

#### Operating Conditions


- Borehole type: All, including air filled (qualitative measurement only)
- Recommended Logging Speed: 4m/min

#### Specifications

- Diameter: 51mm
- Length: Formation Density 3.04m / Density Guardlog 2.89m
- Weight: 21kg (Density Guardlog 28.5kg)
- Temperature: 0-70°C (extended ranges available)
- Max. pressure: 20MPa
- Density range: 1.1 to 2.95g/cc (Formation Density and Density Guardlog probes)  
1.5 to 5.0g/cc (Iron Ore Density probe)
- Caliper range: 50mm to 300mm
- Resistivity range: 1-10000 ohm-m

#### Part Numbers

- I002013 Formation Density probe
- I002016 – includes BRD and temperature
- I014720 Density Guardlog probe with BRD
- I018309 Iron Ore Density probe

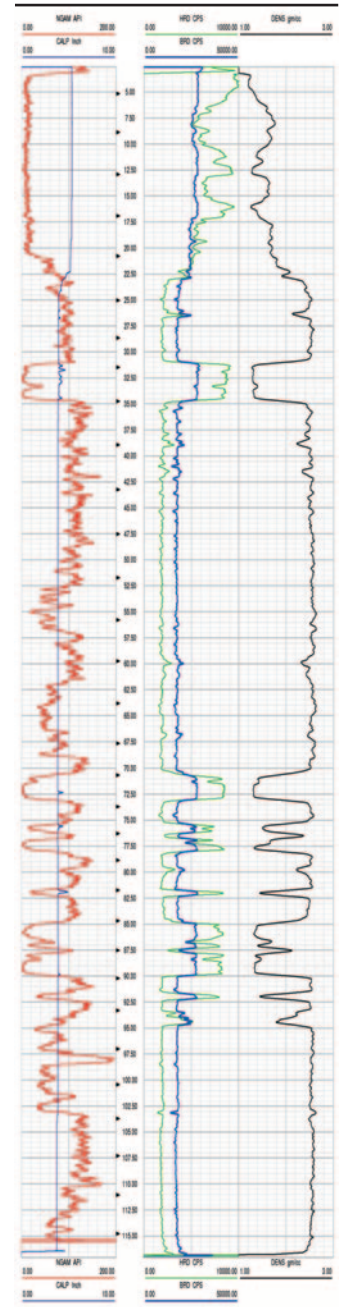

Example of logging data

[▶ CLICK HERE FOR ENQUIRY FORM](#)